



# Kslim **I**

## Kslim II 2.5 The Most Affordable Commercial LED Display

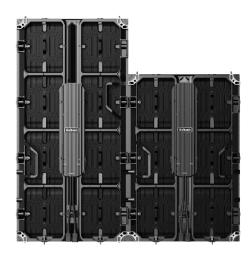

#### Product features:

- Ultrathin and lightweight aluminum die casting structure
- 2. Front & Rear maintenance
- 3. Support dual-view display and canopy screen

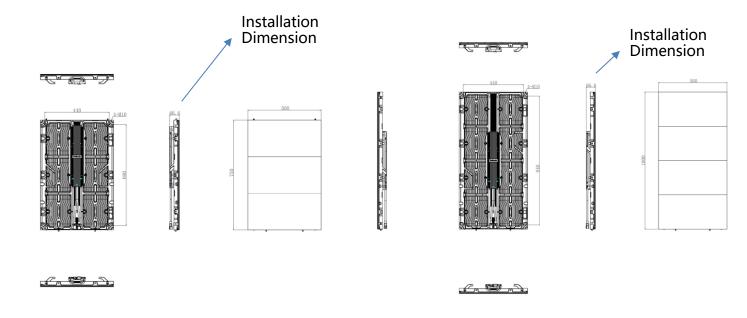

https://www.unilumin.com 2023/8/15 V1.1



### Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.5mm
LED Type	3-in-1 SMD1515
Brightness	800 cd/m²
Pixel Density	160000 pixels/m <sup>2</sup>
Pixels Per Panel	200*400 pixels / 200*300 pixels
Module Size	250mm×250mm
Panel Size	500 mm *1000 mm / 750 mm *39.6 mm (Installation Dimension)
Weight	10 kg/panel / 7.5 kg/panel
Maintenance	Front & Rear
Ingress Protection	IP40/20
Curve	Customized according to customers' needs
Panel Area	0.5 m <sup>2</sup> / 0.375m <sup>2</sup>
Planeness	≤0.2mm
Recommended Viewing Distance	≥2.5m
Environment	indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal / Vertical Viewing Angle	160° / 155°
Contrast Ratio	9000:1
Input Power <max></max>	≤500W/m²
Input Power <typical></typical>	≤167W/m²
Input Voltage	100~240VAC
Processing Depth	≥14bit
Refresh Rate	1920~3840Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+55°C/10~85%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Fixed/Floor-mounted/Hanging
Certification	CE/CB/CCC/ ROHS2.0

#### Note:

- 1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- 2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
- 3. Different configurations can achieve different refresh rates.

https://www.unilumin.com 2023/8/15 V1.1