


Kslim II

Kslim II 2.9 The Most Affordable Commercial LED Display

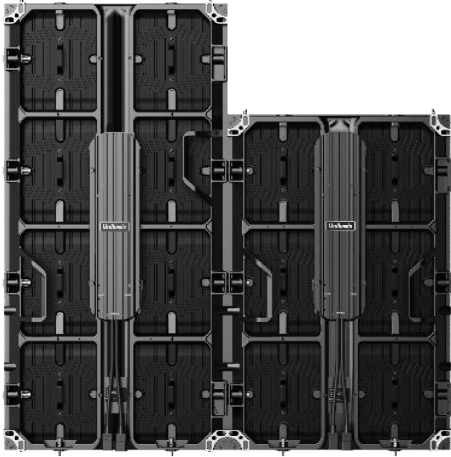


Product features:

1. Ultrathin and lightweight aluminum die casting structure
2. Front & Rear maintenance
3. Support dual-view display and canopy screen

Installation Dimension

Installation Dimension

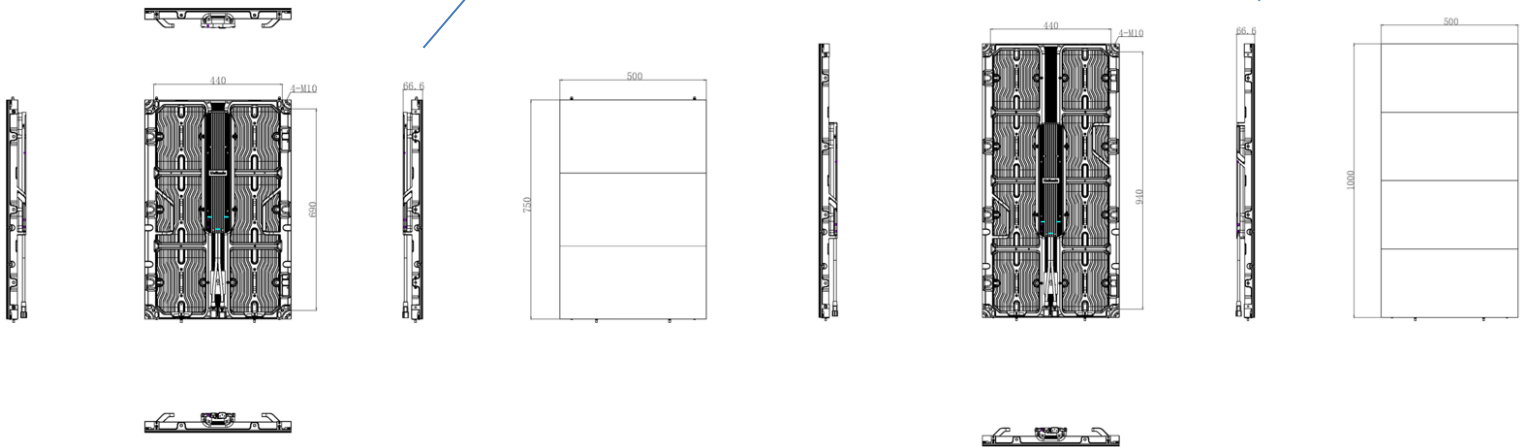

Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.9 mm
LED Type	3-in-1 SMD
Brightness	700 cd/m ²
Pixel Density	112896 pixels/m ²
Pixels Per Panel	168*336 pixels / 168*252 pixels
Module Size	500mm×250mm
Panel Size	500 mm *1000 mm / 750 mm *39.6 mm (Installation Dimension)
Weight	10 kg/panel / 7.5 kg/panel
Maintenance	Front&Rear
Ingress Protection	IP40/20
Curve	Customized according to customers' needs
Panel Area	0.5 m ² / 0.375m ²
Planeness	≤0.2mm
Recommended Viewing Distance	≥2.9m
Environment	indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal / Vertical Viewing Angle	160° / 155°
Contrast Ratio	9000:1
Input Power <Max>	≤500W/m ²
Input Power <Typical>	≤166W/m ²
Input Voltage	100~240VAC
Processing Depth	≥14bit
Refresh Rate	1920~3840Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+55°C/10~85%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Fixed/Floor-mounted/Hanging
Certification	CE/CB/CCC/ ROHS2.0

Note:

- Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
- Different configurations can achieve different refresh rates.