


Kslim II

Kslim II 3.9 The Most Affordable Commercial LED Display




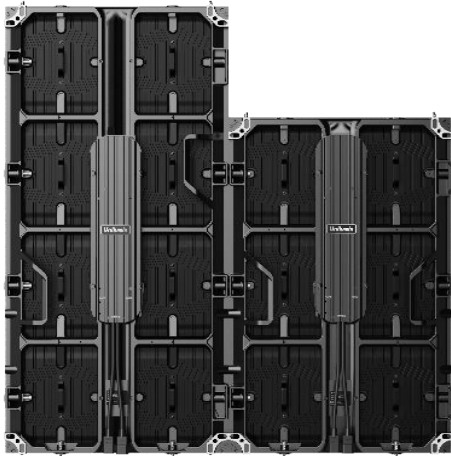


Product features:

1. Ultrathin and lightweight aluminum die casting structure
2. Front & Rear maintenance
3. Support dual-view display and canopy screen

Installation Dimension

Installation Dimension

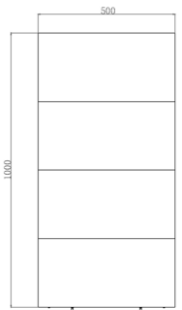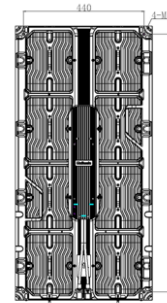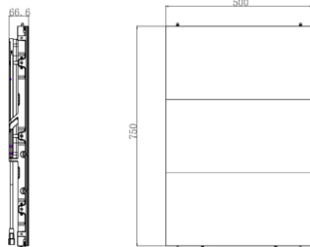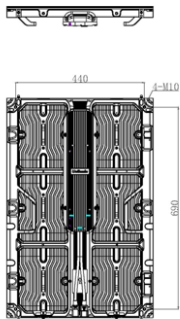

Main Technical Specifications:

Parameter	Value
Pixel Pitch	3.9 mm
LED Type	3-in-1 SMD
Brightness	700 cd/m ²
Pixel Density	65536 pixels/m ²
Pixels Per Panel	128*256 pixels / 128*192 pixels
Module Size	500mm×250mm
Panel Size	500 mm *1000 mm / 750 mm *39.6 mm (Installation Dimension)
Weight	10 kg/panel / 7.5 kg/panel
Maintenance	Front&Rear
Ingress Protection	IP40/20
Curve	Customized according to customers' needs
Panel Area	0.5 m ² / 0.375m ²
Planeness	≤ 0.2mm
Recommended Viewing Distance	≥ 3.9m
Environment	indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal / Vertical Viewing Angle	160° / 155°
Contrast Ratio	9000:1
Input Power <Max>	≤500W/m ²
Input Power <Typical>	≤166W/m ²
Input Voltage	100~240VAC
Processing Depth	≥ 14bit
Refresh Rate	1920~3840Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+55°C/10~85%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Fixed/Floor-mounted/Hanging
Certification	CE/CB/CCC/ ROHS2.0

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
3. Different configurations can achieve different refresh rates.