



# Unslim II



## SERIES PRODUCT SPECIFICATION

### Unslim II 2.5 Creative Indoor

#### LED Display

#### Product features:

- Three standard sizes of cabinets combined with corner arc screen and arc screen can realize different creative shapes such as Round-corner Square, Wave concave and convex arcs etc.
- Semi-outdoor brightness optional, support HDR, perfectly restore video effect.
- Front & Rear installation、maintenance.
- Intelligent Operation and Maintenance\*

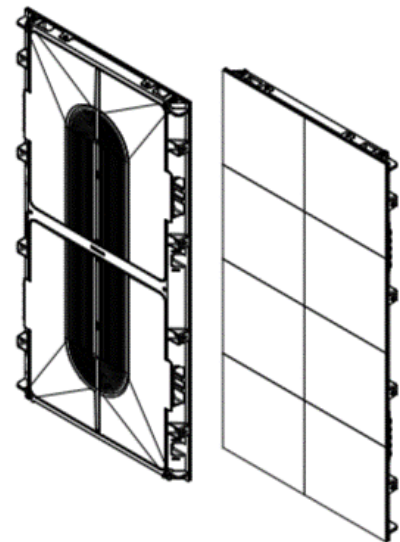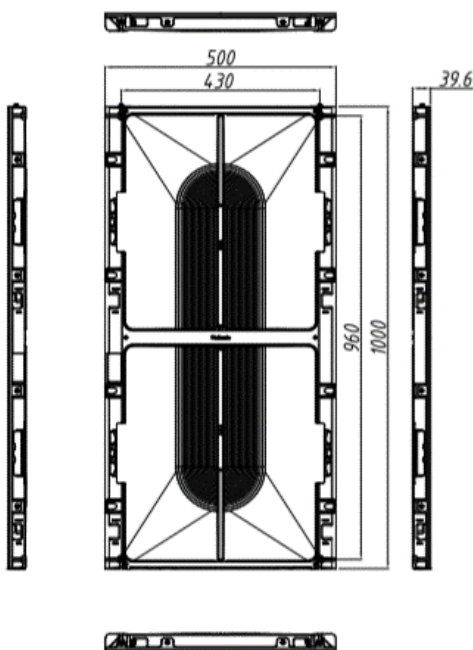

\* optional function

## SPECIFICATION PARAMETERS:

| Specification                | UslimII2.5                               |
|------------------------------|------------------------------------------|
| Pixel Pitch                  | 2.5mm                                    |
| LED Type                     | 3-in-1 SMD                               |
| Brightness                   | 1000cd/m <sup>2</sup>                    |
| Pixel Density                | 160,000pixels/m <sup>2</sup>             |
| Pixels Per Panel             | 200*100/200*200/200*400 pixels           |
| Module Size                  | 250mm×250mm                              |
| Panel Size                   | 500mm×250/500/1000mm×39.6mm              |
| Weight                       | 3.2/5.6/10.5kg/panel                     |
| Maintenance                  | Front and Rear                           |
| Ingress Protection           | IP30                                     |
| Curve                        | Customized according to customers' needs |
| Panel Area                   | 0.125/0.25/0.5m <sup>2</sup>             |
| Planeness                    | ≤0.2mm                                   |
| Recommended Viewing Distance | ≥2.5m                                    |
| Environment                  | indoor                                   |
| Material                     | Die-cast Aluminum                        |
| Calibration                  | Support brightness and chroma            |
| Brightness Control           | Manual/Automatic                         |
| Color Temperature            | 2,000K~9,300K Adjustable                 |
| Horizontal Viewing Angle     | 160°                                     |
| Vertical Viewing Angle       | 160°                                     |
| Contrast Ratio               | 5000:1                                   |
| Input Power <Max>            | 500W/m <sup>2</sup>                      |
| Input Power <Typical>        | 166W/m <sup>2</sup>                      |
| Input Voltage                | 100~240VAC                               |
| Processing Depth             | 14bit                                    |

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Refresh Rate                    | 7680Hz                                        |
| Video Frame Rate                | 50&60Hz                                       |
| Input Power Frequency           | 50~60Hz                                       |
| LED Life Time                   | 100,000 Hours                                 |
| Operating Temperature/Humidity  | -10°C~ +45°C/10~80%RH                         |
| Storage Temperature/Humidity    | -20°C~ +55°C/10~85%RH                         |
| Power Status                    | Diagnostic LEDs                               |
| Standard Mounting Configuration | Fixed/Floor-mounted/Hanging                   |
| Optional Mounting Configuration | Concave and Convex, Round shape, Corner Shape |

Note:

1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

2.The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.